



# Loop-AM3440 Access DCS-MUX

**AM3440-A**



**AM3440-B**



**AM3440-C**



## Features

- Full frontal access (ETSI) Shelf
- DS0 DACS (Digital Access Cross-Connect System) with full cross-connect support
- Dual controller, dual power with load sharing
- 1 for 1 protection via Y-BOX
- 1 for 1 protection, E1, T1, FOM
- PDH ring protection, QE1, QT1, FOM, Mini QE1
- Console, Telnet, and Inband management support
- SNMP v.1 and v.3
- Craft interface port for connection to external Intelligent Front Panel
- Compatible to a SNMP based GUI network management system and supported by LoopView and Loop iNMS
- Three chassis types available: AM3440-A, AM3440-B, AM3440-C
- All the plug-in cards are hot-pluggable

Item	AM3440-A	AM3440-B	AM3440-C
Chassis	5U	2.5U	3U
# of Mini-slots	4	4	4
# of Single slots	12	3	5
Maximum E1 Channels	64	28	36
Maximum T1 Channels	52	16	24
Cross-Connect Backplane Capacity	128 Mbps	56 Mbps	72 Mbps

## Description

The Loop-AM3440-A/B/C series are Access DCS-MUXs that combine various digital access interfaces into E1 or T1 lines for convenient transport and switching. The Loop-AM3440 Access DCS-MUX provides access for a variety of TDM, IP, and voice interfaces detailed on the next page. These interfaces are compatible with other Loop products. Using these products, a DTE interface can be extended over copper wire pairs or any E1/T1 transport facility. Each Quad E1/T1 plug-in card can have as many as DS0 124/96 time slots from G.SHDSL, RS232, X.21, V.35, V.36 and EIA530 / RS449 interfaces, which can be multiplexed to fill 4 E1/T1 lines. The AM3440 also supports fiber optical plug-in cards, which can be used to aggregate up to 4 E1 channels onto a single fiber optical interface to connect with other AM3440 devices or with the O9310-E1.

Each of the 3 models of AM3440 – A, B, and C – has a number of plug-in slots in single slot size and mini size. Card size to slot compatibility is detailed on the next page.

This unit is a full cross-connect and can act as a mini DACS: one or more of the WAN ports can be used as a Drop & Insert function with fractional E1/T1 lines, which can be muxed into a full E1/T1 line.

Redundancy is available in dual CPU controller and power supply options, making it an excellent fit for critical applications. The chassis does not need fan cooling, and thus does not have a fan, though an external fan tray is available.

The AM3440 supports local control and diagnostics by using an external 2-line by 40-character LCD display and keypads, or by using a VT-100 terminal connected to the console port. The AM3440 also supports Ethernet, Telnet, and SNMP, so that it can be controlled and diagnosed from remote locations. An in-band management channel with GUI is available. In addition to the LCD display, there is LED indication for all plug-in cards.

The AM3440 consists of a rugged reinforced aluminum chassis, giving this equipment a durable structure and a long-lasting physical life.

**Loop-AM3440 cards:**

The mini-slot cards plug into the mini-slots of the AM3440. The single-slot cards plug into single slots. The dual-slot cards plug into two adjacent single slots.

	Plug-in cards	AM3440-A	AM3440-B	AM3440-C
<b>Mini-Slot</b>	1-channel E1 (Single E1 interface)	√	√	√
	1-channel T1 (Single T1 interface)	√	√	√
	Mini Quad E1 (Four E1 interfaces)	√	√	√
	1-channel E1 ATM/Frame Relay	D	D	D
	1-channel T1 ATM/Frame Relay	D	D	D
	Fiber optical interface	√	√	√
	1-channel X.21	√	√	√
	1-channel V.35	√	√	√
	1-channel RS232	√	√	√
	1-channel EIA530	√	√	√
	Quad 2W/4W E&M (Four E&M voice interfaces)	x	√	√
	QFXS/QFXO (Four FXS/FXO voice interfaces)	x	√	√
	2-LAN port/32 WAN port Router	√	√	√
	2-LAN port/64 WAN port Router-A	√	√	√
	3-channel Terminal Server	√	√	√
	Phone Line Monitor (PLM) cards	x	√	√
	1-channel OCU-DP	x	√	√
	<b>Single-Slot</b>	3-channel E1	√	√
4-channel E1		√	√	√
4-channel T1		√	√	√
8-channel OCU-DP		√	x	x
2-channel G.SHDSL (2 pairs) w/o line power		√	√	√
4-channel G.SHDSL (1 pair) w/o line power		√	√	√
8-channel G.703 card at 64 Kbps data rate		√	√	√
8-channel Dry Contact I/O		√	√	√
8-channel Dry Contact I/O type B		√	√	√
8-channel 2W/4W E&M		√	√	√
12-channel FXS		√	√	√
12-channel FXO		√	√	√
12-channel Magneto		√	√	√
Conference card		√	√	√
1-channel low speed optical (C37.94)		√	√	√
4-channel low speed optical (C37.94)		√	√	√
8-channel RS232 with X.50 subrate		√	√	√
8-LAN-port/ 64-WAN-port Router-B		√	√	√
4-channel TDMoE		√	√	√
8-channel Data Bridge		√	√	√
1FOMA	√	√	√	
8-channel UDTEA	√	√	√	
<b>Dual-Slot</b>	6-channel X.21/V.11	√	√	√
	6-channel V.35	√	√	√
	6-channel V.36	√	√	√
	6-channel EIA530/RS449 card	√	√	√
	2-channel G. SHDSL (2 pairs) with line power	√	x	x
	4-channel G. SHDSL (1 pair) with line power	√	x	x
	24-channel FXS	√	√	√
	24-channel FXO	√	√	√

**Note:** √ = Supported

x = Not supported

\* = Future Option

D= Discontinued

## Ordering Information

To specify options, choose from the list below:

### Notes:

1. RoHS compliant units are identified by the letter **G** appearing immediately at the end of ordering code.
2. AM3440 chassis types:

**AM3440-CHA:** 5U chassis with 128 Mb/s cross-connect capacity backplane

**AM3440-CHB:** 2.5U chassis with 56 Mb/s cross-connect capacity backplane

**AM3440-CHC:** 3U chassis with 72 Mb/s cross-connect capacity backplane

Model (non RoHS compliant)	Model (RoHS compliant)	Description	Notes
<b>Main Unit</b>			
Loop-AM3440-CHA	Loop-AM3440-CHA- <b>G</b>	Wideband Main Unit without CPU, power and plug-in cards	AM3440-A, B, C type Chassis. 19"/23" ear mount included.
Loop-AM3440-CHB	Loop-AM3440-CHB- <b>G</b>	Wideband Main Unit without CPU, power and plug-in cards	<b>Note:</b> For other ear mount requests, please contact your nearest Loop sales representative.
Loop-AM3440-CHC	Loop-AM3440-CHC- <b>G</b>	Wideband Main Unit without CPU, power and plug-in cards	
<b>Main Unit for DS0 SNCP function</b>			
Loop-AM3440-CHAJ	Loop-AM3440-CHAJ- <b>G</b>	Wideband Main Unit without CPU, power and plug-in cards, applicable to use with 3E1 card	Must order AM3440-CHAJ for DS0 SNCP function
Loop-AM3440-CHCJ	Loop-AM3440-CHCJ- <b>G</b>	Wideband Main Unit without CPU, power and plug-in cards, applicable to use with 3E1 card	Must order AM3440-CHCJ for DS0 SNCP function
<b>CPU Module</b>			
Loop-AM3440-CCA-T	Loop-AM3440-CCA-T- <b>G</b>	CPU card with T1 External Clock (order two for redundancy)	
Loop-AM3440-CCA-E	Loop-AM3440-CCA-E- <b>G</b>	CPU card with E1 External Clock (order two for redundancy)	
<b>Mini Plug-in Module</b> (Select 1 to 4 cards from list below)			
Loop-AM3440-E75	Loop-AM3440-E75- <b>G</b>	1-channel of E1 plug-in card w/ 75 ohm	
Loop-AM3440-E120	Loop-AM3440-E120- <b>G</b>	1-channel of E1 plug-in card w/ 120 ohm	
Loop-AM3440-T1	Loop-AM3440-T1- <b>G</b>	1-channel T1 plug-in card	
Loop-AM3440-M4E75	Loop-AM3440-M4E75- <b>G</b>	Mini Quad E1 plug-in card with 75 ohm	Includes a three meter conversion cable, please make a note on which cable you need. (Loop-ACC-CAB-DB25M-300-8BNM or Loop-ACC-CAB-DB25M-300-8BNCF)
Loop-AM3440-M4E120	Loop-AM3440-M4E120- <b>G</b>	Mini Quad E1 plug-in card with 120 ohm	Includes a three meter conversion cable (Loop-ACC-CAB-DB25M-300-4RJ48M)
Loop-AM3440-RT	Loop-AM3440-RT- <b>G</b>	2-LAN ports/32 WAN port Router/Bridge plug-in card	
Loop-AM3440-RTA	Loop-AM3440-RTA- <b>G</b>	2-LAN ports/64 WAN port router/bridge plug-in card	
Loop-AM3440-FOM-opt	Loop-AM3440-FOM-opt- <b>G</b>	Fiber Optical plug-in card	For <b>opt</b> option, please refer to the table below for detail information
Loop-AM3440-TS	Loop-AM3440-TS- <b>G</b>	3-channel Terminal Server plug-in card	Includes a one meter conversion cable (Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-TS)
Loop-AM3440-1X21	Loop-AM3440-1X21- <b>G</b>	1-channel X.21 plug-in card	

Loop-AM3440-1RS232	Loop-AM3440-1RS232- <b>G</b>	1-channel RS232 plug-in card	
Loop-AM3440-1V35	Loop-AM3440-1V35- <b>G</b>	1-channel V.35 plug-in card	
Loop-AM3440-1E530	Loop-AM3440-1E530- <b>G</b>	1-channel EIA530 plug-in card	
Loop-AM3440-1ODP	Not available	1 port OCU-DP Interface card	AM3440-CHB and AM3440-CHC only <b>Limited Quantity</b>
Loop-AM3440-Q2EM-m-Tn-x-pt	Loop-AM3440-Q2EM-m-Tn-x-pt - <b>G</b>	Quad 2 Wire E&M voice plug-in card	AM3440-CHB and AM3440-CHC only  For <b>m</b> , <b>n</b> and <b>x</b> option, please refer to the table below for detail information
Loop-AM3440-Q4EM-m-Tn-x-pt	Loop-AM3440-Q4EM-m-Tn-x-pt - <b>G</b>	Quad 4 Wire E&M voice plug-in card	For <b>pt</b> option, please refer to the table below for detail information
Loop-AM3440-QFXS-x-pt	Loop-AM3440-QFXS-x-pt- <b>G</b>	Quad FXS voice plug-in card	AM3440-CHB and AM3440-CHC only
Loop-AM3440-QFXS-M-x-pt	Loop-AM3440-QFXS-M-x-pt- <b>G</b>	Quad FXS with MP 16 KHz voice plug-in card	<b>GS</b> = Ground Start
Loop-AM3440-QFXS-M12-x-pt	Loop-AM3440-QFXS-M12-x-pt- <b>G</b>	Quad FXS with MP 12 KHz voice plug-in card	<b>MP</b> = Metering Pulse Transmit 12/16 KHz
Loop-AM3440-QFXS-GS-x-pt	Loop-AM3440-QFXS-GS-x-pt- <b>G</b>	Quad FXS with GS plug-in card	<b>pt</b> = power type
Loop-AM3440-QFXS-GM-x-pt	Loop-AM3440-QFXS-GM-x-pt- <b>G</b>	Quad FXS with GS and MP 16 KHz voice plug-in card	For <b>x</b> option, please refer to the table below for detail information  For <b>pt</b> option, please refer to the table below for detail information  QFXS-GM includes all QFXS card functions
Loop-AM3440-QFXO-x	Loop-AM3440-QFXO-x- <b>G</b>	Quad FXO voice plug-in card	AM3440-CHB and AM3440-CHC only
Loop-AM3440-QFXO-M-x	Loop-AM3440-QFXO-M-x- <b>G</b>	Quad FXO with MP 16 KHz voice plug-in card	<b>GS</b> = Ground Start
Loop-AM3440-QFXO-M12-x	Loop-AM3440-QFXO-M12-x- <b>G</b>	Quad FXO with MP 12 KHz voice plug-in card	<b>MP</b> = Metering Pulse Receive 12/16 KHz
Loop-AM3440-QFXO-GS-x	Loop-AM3440-QFXO-GS-x- <b>G</b>	Quad FXO with GS plug-in card	For <b>x</b> option, please refer to the table below for detail information
Loop-AM3440-QFXO-GM-x	Loop-AM3440-QFXO-GM-x- <b>G</b>	Quad FXO with GS and MP 16 KHz voice plug-in card	For <b>x</b> option, please refer to the table below for detail information  QFXO-GM includes all QFXO card functions
Loop-AM3440-PLM(A)	Not available	Phone Line Monitor (A) Line plug-in card with phone line monitor	Need to order in pair  Available in AM3440-B/C only
Loop-AM3440-PLM(B)	Not available	Phone Line Monitor (B) Monitor plug-in card	
<b>Single Slot Plug-in Module</b>			
Not available	Loop-AM3440-8UDTEA- <b>G</b>	8-port universal data interface card that supports RS232/RS422/RS485 DCE	

		interface via software configurable	
Not available	Loop-AM3440-3E1-cc- <b>G</b>	3-channel E1 plug-in card with DS0 (64K bps) SNCP protection Note: DS0 SNCP protection only support E1 frame mode	Order with <b>Loop-AM3440-CHAJ</b> or <b>Loop-AM3440-CHCJ</b> ONLY  For <b>cc</b> option, please refer to the table below for detail information  For controller hardware version <b>J</b> and software version <b>8.02.01</b> or newer versions.
Not available	Loop-AM3440-TDMoE-PP M- <b>G</b>	TDMoE card with 2 GbE combo interfaces and 2 Ethernet interfaces (10/100/1000BaseT) plug-in module Support G.823 Traffic	
Not available	Loop-AM3440-TDMoE-PP B- <b>G</b>	TDMoE card with 2 GbE combo interfaces and 2 Ethernet interfaces (10/100/1000BaseT) plug-in module Support G.823 Synchronization	
Loop-AM3440-4E1-cc	Loop-AM3440-4E1-cc- <b>G</b>	4-channel E1 plug-in card	For <b>cc</b> option, please refer to the table below for detail information
Loop-AM3440-4T1	Loop-AM3440-4T1- <b>G</b>	4-channel T1 plug-in card	
Loop-AM3440-2GH	Loop-AM3440-2GH- <b>G</b>	2-channel G.SHDSL plug-in card (2 pair)	
Loop-AM3440-4GH	Loop-AM3440-4GH- <b>G</b>	4-channel G.SHDSL plug-in card (1 pair)	
Loop-AM3440-8CD	Loop-AM3440-8CD- <b>G</b>	8-channel G.703 plug-in card at 64 Kbps data rate	
Loop-AM3440-8DC	Loop-AM3440-8DC- <b>G</b>	8-channel dry contact plug-in card with maximum voltage 100 Vdc or 250 Vac	
Not available	Loop-AM3440-8DCB- <b>G</b>	8-channel dry contact type B plug-in card with maximum voltage 220 Vdc or 250 Vac	
Loop-AM3440-1C37	Loop-AM3440-1C37- <b>G</b>	1- channel C37.94 plug-in card	
Loop-AM3440-4C37	Loop-AM3440-4C37- <b>G</b>	4- channel C37.94 plug-in card	
Loop-AM3440-ODP	Not available	8-channel OCU-DP plug-in card	For AM3440-CHA only. <b>Limited Quantity</b>
Loop-AM3440-8RS232-RJ	Loop-AM3440-8RS232-RJ- <b>G</b>	8-port RS232 plug-in card with X.50 subrate multiplexing scheme and X.54 encoding, with 8 RJ48 connectors for 8 RS232 Async ports	
Loop-AM3440-8RS232-DB	Loop-AM3440-8RS232-DB- <b>G</b>	8-port RS232 plug-in card with X.50 subrate multiplexing scheme and X.54 encoding, with 2 RJ48 connectors and 2 DB44 connectors for Async and Sync ports	Two conversion cables are included (DB44 connector to two DB25 and one DB9 connector; (Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-DB).
Not available	Loop-AM3440-8DBRA-RJ- <b>G</b>	8-channel data bridge plug-in card, with 8 RJ48 connectors for 8 data bridge Async ports	
Not available	Loop-AM3440-8DBRA-DB-	8-channel data bridge plug-in	Two conversion cables are

	<b>G</b>	card, with 2 RJ48 connectors and 2DB44 connectors for 8 data bridge Async ports	included (DB44 connector to two DB25 and one DB9 connector; (Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-DB).
Loop-AM3440-RTB	Loop-AM3440-RTB- <b>G</b>	8-LAN ports/64 WAN ports router/bridge plug-in card	For controller hardware version <b>F</b> and software version <b>6.05.02</b> or newer versions.
Not available	Loop-AM3440-1FOMA-opt- <b>G</b>	1FOMA Fiber Optical Interface with 1x9 optical port	For <b>opt</b> option, please refer to the table below for detail information For controller hardware version <b>F</b> and software version <b>V8.15.01</b> or newer versions.
Not available	Loop-AM3440-CONF- <b>G</b>	Conference plug-in card with two RS232 data ports, two FXS ports and two E&M ports	For controller hardware version <b>F</b> and software version <b>7.05.01</b> or newer versions.
Loop-AM3440-8EM-x	Loop-AM3440-8EM-x- <b>G</b>	8-channel 2W/4W E&M plug-in card with 8 RJ45	For <b>x</b> option, please refer to the table below for detail information
Loop-AM3440-12FXS-sn-pt	Loop-AM3440-12FXS-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and PLAR. Without Ground Start and Metering Pulse. Used with 12 RJ11.	12FXS-GMP includes all FXS card functions  For <b>sn</b> option, please refer to the table below for detail information  <b>pt=</b> power type.  For <b>pt</b> option, please refer to the table below for detail information  The IEEE1613 standard applies to AM3440-CHA/CHC only
Loop-AM3440-12FXS-P-sn-pt	Loop-AM3440-12FXS-P-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [PLAR bit programmable]. Without Ground Start and Metering Pulse. Used with 12 RJ11.	
Loop-AM3440-12FXS-M-sn-pt	Loop-AM3440-12FXS-M-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12FXS-MPP-sn-pt	Loop-AM3440-12FXS-MPP-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [PLAR bit programmable] and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12FXS-GS-sn-pt	Loop-AM3440-12FXS-GS-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Ground Start]. Used with 12 RJ11.	
Loop-AM3440-12FXS-GM-sn-pt	Loop-AM3440-12FXS-GM-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [Ground Start] and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12FXS-GMP-sn-pt	Loop-AM3440-12FXS-GMP-sn-pt- <b>G</b>	12-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start,	



		PLAR, [PLAR bit programmable], [Ground Start] and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12FXO	Loop-AM3440-12FXO-G	12-channel FXO plug-in card with 600/900 Impedance, Battery Reverse and Loop Start. Without Ground Start and Metering Pulse. Used with 12 RJ11.	12FXO-GM includes all FXO card functions
Loop-AM3440-12FXO-M	Loop-AM3440-12FXO-M-G	12-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12FXO-GS	Loop-AM3440-12FXO-GS-G	12-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and [Ground Start]. Used with 12 RJ11.	
Loop-AM3440-12FXO-GM	Loop-AM3440-12FXO-GM-G	12-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, [Ground Start] and [Metering Pulse]. Used with 12 RJ11.	
Loop-AM3440-12MAG-A-1 G-x	Loop-AM3440-12MAG-A-1 G-x -G	12-channel Magneto ring-one-time plug-in module w/ L1. GND	This card can be used in AM3440-A/B/C only.
Loop-AM3440-12MAG-A-1 2-x	Loop-AM3440-12MAG-A-1 2-x -G	12-channel Magneto ring-one-time plug-in module w/ L1, L2	12MAG-A-1G2 includes all function of 12MAG-A cards.
Loop-AM3440-12MAG-A-1 G2-x	Loop-AM3440-12MAG-A-1 G2-x -G	12-channel Magneto ring-one-time plug-in module w/ L1, L2, and L1. GND	For x option, please refer to the table below for detail information
Loop-AM3440-12MAG-1G-x	Loop-AM3440-12MAG-1G-x-G	12-channel Magneto plug-in module w/ L1. GND	This card can be used in AM3440-A/B/C only.
Loop-AM3440-12MAG-12-x	Loop-AM3440-12MAG-12-x-G	12-channel Magneto plug-in module w/ L1, L2	12MAG-1G2 includes all function of MAG cards.
Loop-AM3440-12MAG-1G2-x	Loop-AM3440-12MAG-1G2-x-G	12-channel Magneto plug-in module w/ L1, L2, and L1. GND	For x option, please refer to the table below for detail information
<b>Dual Slot Plug-in Module</b>			
Loop-AM3440-6X21A	Loop-AM3440-6X21A-G	6-channel X.21/V.11 plug-in card with DB15S connector	
Loop-AM3440-6V35A	Loop-AM3440-6V35A-G	6-channel V.35 plug-in card with DB25S connector via conversion cable to M34 (2M bits per channel)	
Loop-AM3440-6V36A	Loop-AM3440-6V36A-G	6-channel V.36 plug-in card with DB25 connector via conversion cable to DB37	
Loop-AM3440-6E530A	Loop-AM3440-6E530A-G	6-channel EIA530 plug-in card with DB25 connector	
Loop-AM3440-6RS449A	Loop-AM3440-6RS449A-G	6-channel EIA530/RS449 plug-in card with DB25 connector via conversion	Includes a 30 cm conversion cable (Loop-ACC-CAB-DB25M-30-1 DB37F)

		cable to DB37	
Loop-AM3440-2GHL	Not available	2-channel G.SHDSL plug-in card with line power source (140 Vdc, 110mA), (2 pair)	For AM3440-CHA only  Factory installed option available with -48 Vdc, -125Vdc powered chassis only.  With line power, takes 2 DTE slots per card.  Fan tray required.
Loop-AM3440-4GHL	Not available	4-channel G.SHDSL plug-in card with line power source (190 Vdc, 60mA), (1 pair)	For AM3440-CHA only  Factory installed option available with -48 Vdc, -125Vdc powered chassis only.  With line power, takes 2 DTE slots per card.  Fan tray required.
Loop-AM3440-24FXS- <b>sn-pt</b>	Loop-AM3440-24FXS- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and PLAR. Without Ground Start and Metering Pulse	24FXS-GMP includes all FXS card functions.  <b>pt</b> = power type  For <b>sn</b> option, please refer to the table below for detail information  For <b>pt</b> option, please refer to the table below for detail information  The IEEE1613 standard applies to AM3440-CHA/CHC
Loop-AM3440-24FXS-P- <b>sn-pt</b>	Loop-AM3440-24FXS-P- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [PLAR bit programmable]. Without Ground Start and Metering Pulse	
Loop-AM3440-24FXS-M- <b>sn-pt</b>	Loop-AM3440-24FXS-M- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Metering Pulse].	
Loop-AM3440-24FXS-MPP- <b>sn-pt</b>	Loop-AM3440-24FXS-MPP- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [PLAR bit programmable] and [Metering Pulse].	
Loop-AM3440-24FXS-GS- <b>sn-pt</b>	Loop-AM3440-24FXS-GS- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Ground Start].	
Loop-AM3440-24FXS-GM- <b>sn-pt</b>	Loop-AM3440-24FXS-GM- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [Ground Start] and [Metering Pulse].	
Loop-AM3440-24FXS-GMP- <b>sn-pt</b>	Loop-AM3440-24FXS-GMP- <b>sn-pt-G</b>	24-channel FXS plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [PLAR bit programmable], [Ground Start] and [Metering	











		Pulse].	
Loop-AM3440-24FXO	Loop-AM3440-24FXO-G	24-channel FXO plug-in card with 600/900 Impedance, Battery Reverse and Loop Start. Without Ground Start and [Metering Pulse].	24FXO-GM includes all FXO card functions.
Loop-AM3440-24FXO-M	Loop-AM3440-24FXO-M-G	24-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and [Metering Pulse].	
Loop-AM3440-24FXO-GS	Loop-AM3440-24FXO-GS-G	24-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and [Ground Start].	
Loop-AM3440-24FXO-GM	Loop-AM3440-24FXO-GM-G	24-channel FXO plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, [Ground Start] and [Metering Pulse].	

### Accessories

#### Power Module

Loop-AM3440-SD	Loop-AM3440-SD-G	Single -48 Vdc (-36 to -75 Vdc) Power Module (100W)	For AM3440-CHA only
Loop-AM3440-S5	Loop-AM3440-S5-G	Single -48 Vdc (-36 to -75 Vdc) Power Module (150W)	For shared redundancy, order 2 single DC.
Loop-AM3440-SD125	Loop-AM3440-SD125-G	Single -125 Vdc (-40 to -150 Vdc) Power Module (100W)	For AM3440-CHA only  For shared redundancy, order 2 single DC  If the user orders -125 Vdc power module, the maximum number of cards allowed in slot 1 to 12 is: <ul style="list-style-type: none"> <li>• Four 12-channel FXS</li> <li>• Nine 12-channel Magneto</li> <li>• Eleven 8-channel 2W/4W E&amp;M</li> <li>• Six 8-channel OCU-DP</li> <li>• Two 4-channel G. SHDSL (1 pair) with line power</li> <li>• Three 2-channel G. SHDSL (2 pairs) with line power</li> <li>• Two 24-channel FXS</li> </ul> There are no limitations for other plug-in cards in slot 1 to 12.  There are no limitations for any plug-in cards in slot A to D.  For power consumption details, please refer to AM3440-A User's Manual.
Loop-AM3440-S524	Loop-AM3440-S524-G	Single -24 Vdc (-18 to -36 Vdc) Power Module (150W)	For AM3440-CHA only  Cannot be used with MAG card.
Loop-AM3440-SDB	Loop-AM3440-SDB-G	Single -48 Vdc (-36 to -75 Vdc) Power Module (100W)	For AM3440-CHB/CHC  For shared redundancy, order 2 single DC.

Loop-AM3440-SAB	Loop-AM3440-SAB-G	Single AC plug-in power supply (100 to 240 Vac, 50/60 Hz)	For AM3440-CHB/CHC For AC, no redundancy Choose an appropriate power cord
<b>Mounting Ear</b>			
19"/23" ear mounts	A pair of 19"/23" ear mounts is supplied as part of standard package. Note: For other sizes, please contact your nearest Loop sales representative.		
<b>User's Manual</b>			
Loop-AM3440-UM	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.		For AM3440-CHA only
Loop-AM3440-UMB	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.		For AM3440-CHB only
Loop-AM3440-UMC	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.		For AM3440-CHC only
<b>Power Cord</b> (All power cord are RoHS compliant)			
Loop-ACC-PC-USA	AC power cord for Taiwan/America		
Loop-ACC-PC-EU	AC power cord for Europe		
Loop-ACC-PC-UK	AC power cord for UK		
Loop-ACC-PC-AUS	AC power cord for Australia		
Loop-ACC-PC-CH	AC power cord for China		
<b>Power Adaptor</b> (All power adaptor are RoHS compliant)			
Loop-ACC-APA-240-G	240 Watt, AC (3.6A, auto sensing) to DC (+48 Vdc, 5A) adaptor for USA		
Loop-ACC-APE-240-G	240 Watt, AC (3.6A, auto sensing) to DC (+48 Vdc, 5A) adaptor for Europe		
Loop-ACC-APU-240-G	240 Watt, AC (3.6A, auto sensing) to DC (+48 Vdc, 5A) adaptor for UK		
<b>Fan Tray</b>			
Loop-AM3440-FAN	Loop-AM3440-FAN-G	Fan tray	For AM3440-CHA only  Power supplied from rear of chassis.  If total power consumption of device and cards is more than 60 Watts, an additional fan tray is required. For power consumption and fan tray plan, please refer to AM3440-A User's Manual.
<b>FXO Box</b>			
Loop-AM3440-FXO BOX	Support FXO Interface Battery Feed		
<b>External LCD</b>			
Loop-AM3440-LCD	Loop-AM3440-LCD-G	External LCD and Keypad	only cover selected plug-in cards only, contact your nearest Loop sales representative for detail
<b>Software</b>			
Loop-AM3440-ERING	ULSR-PDH Ring software <b>Note:</b> ULSR ring only support E1 framed mode.		Used with 4E1, M4E75, M4E120 and FOM
Loop-AM3440-TRING	ULSR-PDH Ring software <b>Note:</b> ULSR ring only support T1 framed mode.		Used with 4T1
<b>Conversion Cables</b> (All conversion cables are RoHS compliant)			
Loop-ACC-CAB-DB25M-100-8BNCM	DB25/Male to eight BNC/Male cable; Length: 100 cm		Used in Loop-AM3440-M4E75 plug-in card
Loop-ACC-CAB-DB25M-100-8BNCF	DB25/Male to eight BNC/Female cable; Length: 100 cm		Used in Loop-AM3440-M4E75 plug-in card
Loop-ACC-CAB-DB25M-300-8BNCM	DB25/Male to eight BNC/Male cable; Length: 300 cm		Used in Loop-AM3440-M4E75 plug-in card
Loop-ACC-CAB-DB25M-300-8BNCF	DB25/Male to eight BNC/Female cable; Length: 300 cm		Used in Loop-AM3440-M4E75 plug-in card
Loop-ACC-CAB-DB25M-	DB25/Male to four RJ48C/Male cable; Length: 100 cm		Used in Loop-AM3440-M4E120

100-4RJ48M		plug-in card
Loop-ACC-CAB-DB25M-300-4RJ48M	DB25/Male to four RJ48C/Male cable; Length: 300 cm	Used in Loop-AM3440-M4E120 plug-in card
Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-D B	DSUB-44 pin/Male to two DSUB-25 pin/Female- one DSBU-9 pin/Female (8P8C) plug, Length:100cm	Used in Loop-AM3440-8RS232-DB, Loop-AM3440-8DBRA-DB plug-in card
Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-TS	DSUB-44 pin/Male to two DSUB-25 pin/Female- one DSBU-9 pin/Female (8P8C) plug, Length:100cm	Used in Loop-AM3440-TS plug-in card
Loop-ACC-CAB-DB25M-30-1M34F	DSUB-25pin/Male to M34/Female V.35 Conversion cable Length: 30 cm	Used in Loop-AM3440-6V35A and Loop-AM3440-1V35 plug-in cards
Loop-ACC-CAB-DB25M-30-1DB37F	DSUB-25pin/Male to DSUB-37/Female RS449 Conversion cable Length: 30 cm	Used in Loop-AM3440-6V36A and Loop-AM3440-6R449A plug-in cards
<b>Y-Box(All Y-Box are RoHS compliant)</b>		
Loop-VV-B-G	1 for 1 protection Y-Box with BNC connectors (4-E1)	Used with 4E1
Loop-VV-R-G	1 for 1 protection Y-Box with RJ48C connectors (16-E1)	Used with 4E1
Loop-VV-T-G	1 for 1 protection Y-Box with RJ48C connectors (16-T1)	Used with 4T1
<b>Blank Panels(All blank panels are RoHS compliant)</b>		
30.000333.A00-G	Blank Panel for Power Supply Slot (flat)	For AM3440-CHA only
30.001257.A00-G	Blank Panel for Power Supply Slot (flat)	For use in AM3440-CHB/CHC
30.000349.A00-G	Blank Panel for Controller Slot (flat)	For use in any AM3440 chassis
30.000335.A00-G	Blank Panel for mini Slot A-D (flat)	For use in AM3440-CHA/CHB/CHC
30.000331.A00-G	Blank Panel for Slot 1-12 (flat)	For use in AM3440-CHA/CHB/CHC
30.001028.A00-G	Blank Panel for Power Slot (u-shape)	For AM3440-CHA only
30.001029.A00-G	Blank Panel for Controller (u-shape)	For use in any AM3440 chassis
30.001030.A00-G	Blank Panel for mini Slot A-D (u-shape)	For use in AM3440-CHA/CHB/CHC
30.001027.A00-G	Blank Panel for Slot 1-12 (u-shape)	For use in AM3440-CHA/CHB/CHC
<b>SFP Optical Modules</b>		
Please place your order using the 5-digit alphanumeric codes listed in the separate SFP Optical Module Brochure.		

**For 4E1 and 3E1cards**

■ Where **cc** is used to select connector:

cc =	Description	Note
RJ	RJ48C connector	
BNC	BNC connector	

**For FOM and 1FOMA card**

■ Where **opt** is used to select optical module type (All optical modules are RoHS compliant):

opt =	Description	Note
SAA	Single optical module with dual uni-directional fiber, 1310 nm, SC optical connector, 30 km - <b>S1.1</b>	Use dual fiber Units delivered ITU-T G.957 application code
SBB	Single optical module with dual uni-directional fiber, 1310 nm, SC optical connector, 50 km - <b>L1.1</b>	
SCC	Single optical module with dual uni-directional fiber, 1310 nm, FC optical connector, 30 km - <b>S1.1</b>	
SDD	Single optical module with dual uni-directional fiber, 1550 nm, SC optical connector, 20 km - <b>S1.2</b>	
SEE	Single optical module with dual uni-directional fiber, 1550 nm, SC optical connector, 100 km - <b>L1.2</b>	
SSM	Single optical module with single bi-directional fiber (master), 1310 nm transmit and 1550 receive, SC optical connector, 30 km - <b>S1.1/ S1.2</b>	1310 nm from master to slave Order <b>SSM</b> to use with <b>SSS</b> Use 1 fiber ITU-T G.957 application code
SSS	Single optical module with single bi-directional fiber (slave), 1310 nm receive and 1550 transmit, SC optical connector, 30 km - <b>S1.1/ S1.2</b>	1550 nm from slave to master Order <b>SSS</b> to use with <b>SSM</b> Use 1 fiber

ITU-T G.957 application code

**Note:** For other special optical modules, please contact your nearest Loop sales representative.

**For Quad 2W/4W E&M card:**

■ Where **m** is used to select QEM card signaling side (must select one):

<b>m =</b>	<b>Description</b>	<b>Note</b>
<b>B</b>	B (carrier side) connects to A side.	
<b>A</b>	A (exchange side) connects to B side. A side M lead to B side M lead, A side E lead to B side E lead.	

■ Where **n** is used to select QEM card signaling type (must select one):

<b>n =</b>	<b>Description</b>	<b>Note</b>
<b>O</b>	For voice transmission only.	Circuit Type doesn't matter.
<b>1</b>	Type I (Original) E&M Signaling Circuit	M lead provides discharge for the A side.
<b>2</b>	Type II Circuit. This design attempts to reduce ground noise by adding two leads: SB (Signal to Battery) and SG (Signal to Ground)	Reduced ground noise. Ground current is eliminated at the cost of two more wires per circuit.
<b>3</b>	Type III Circuit. The SG lead serves as a discharge for the M lead. Reduces delay caused by combination of (a) low current electronic detectors, and (b) long runs of the E and M leads.	Type III is rare because ground currents on the E return would cause noise
<b>4</b>	Type IV Circuit. Based on the Type 2 circuit. This E&M circuit provides symmetry.	
<b>5</b>	Type V Circuit. For applications where ground noise is not an issue. Based on the Type 2 circuit.	

**For voice card(8-channel 2W/4W E&M, Quad 2W/4W E&M and QFXS/QFXO):**

■ Where **x** is used to select all of voice card signaling bits. If this option is not required, omit the **x** field in the ordering code.

	<b>x =</b>	<b>Description</b>	<b>Note</b>
<b>8EM</b>	<b>E</b>	Follows ETSI signaling bits	Jumper selectable for all channels
	<b>A</b>	Follows ANSI signaling bits	
	<b>R</b>	Reverse for ON-HOOK and OFF-HOOK signaling bits exchange	
	<b>AR</b>	Follows ANSI signaling bits and reverse bit	
	<b>S</b>	Follows customer's special bit or function assignment	
	<b>S4</b>	Disable the function of the test button	
	<b>S5</b>	Forcing all ports to be OFF-HOOK when an alarm occurs	
<b>QEM</b>	<b>E</b>	Follows ETSI signaling bits	
	<b>A</b>	Follows ANSI signaling bits	
	<b>S</b>	Follows customer's special bits assignment	
<b>QFXS/QFXO</b>	<b>A</b>	Follows ANSI signaling bits	■ <b>A</b> and <b>S</b> are for QFXS/QFXO
	<b>S</b>	Follows customer's special bits assignment	
	<b>T</b>	Trunk condition OFF-HOOK	■ <b>T</b> , <b>AT</b> , <b>ST</b> are for QFXO only
	<b>AT</b>	Follows ANSI signaling bits w/ trunk condition OFF-HOOK	
	<b>ST</b>	Follows customer's special bits assignment w/ trunk condition OFF-HOOK	

**Note:**

- For S (customer's special bit), please contact your nearest Loop sales representative.
- If x is not selected from table above, the default setting for signaling bits is ETSI and for trunk condition is ON-HOOK.

**For 12/24-channel FXS card:**

■ Where **sn** is used to select special function. If this option is not required, omit the **sn** field in the ordering code.

<b>sn =</b>	<b>Description</b>	<b>Note</b>
<b>sn = omit</b>	FXS Loop Feed = -48 Vdc with 25 mA current limit; alarm tone enable; normal ring	
<b>S1</b>	FXS Loop Feed = -48 Vdc with 35 mA current limit	
<b>S4</b>	Remove alarm tone	
<b>S5</b>	Double ring tone transmit	

**Note:** For sn (special function), please contact your nearest Loop sales representative.

**For 12/24-channel FXS, QFXS, and QE&M card:**

■ Where **pt** is used to select the following functions.

pt=	Description	Note
<b>PWR</b>	For AM3440-CHA with -48Vdc (SD, S5), or -125Vdc (SD125) power modules For AM3440-CHB/CHC with -48Vdc (SDB), or AC (SAB) power modules	
<b>PWRIE1613</b>	For AM3440-CHA with -48Vdc (S5) power complied with IEEE1613 standard For AM3440-CHC with -48Vdc (SDB) power complied with IEEE1613 standard	For AM3440-CHA/CHC
<b>24</b>	For AM3440-CHA with -24Vdc (S524) power module	Only for 12/24-channel FXS

**For Magneto Card:**

■ Where **x** is used to select version type:

x=	Description	Note
<b>16</b>	16 Hz ring generator	20 Hz is the general setting for all MAG cards. For special settings (16, 25, 50), please specify your need by filling in the <b>x</b> option.
<b>20</b>	20 Hz ring generator	
<b>25</b>	25 Hz ring generator	
<b>50</b>	50 Hz ring generator	

**For TDMoE:**

**SFP Optical/Electrical Module Plug-in option, please go to SFP Optical Module Brochure for detail.**

**For Firmware Upgrade:**

Firmware Upgrade		
Loop-AM3440-card-FWUPGR	Firmware Upgrade and Warranty Renewal. The Customer whose warranty has lapsed or desire to have a firmware upgrade can purchase this option. This will upgrade the firmware to the most current version and provide an additional 12 months of support.	For available card types, please refer to the table below for detail information.

■ Where **card** is used to select card type:

card=	Description	Note
<b>CCA</b>	CPU card	
<b>M4E</b>	Mini quad E1 card	
<b>4E1</b>	Quad E1 card Available for software version <b>3.02.01</b> or newer versions.	
<b>4T1</b>	Quad T1 card Available for software version <b>3.02.01</b> or newer versions.	
<b>RTA</b>	RTA card Available for software version <b>2.05.01</b> or newer versions.	
<b>RTB</b>	RTB card Available for software version <b>1.04.01</b> or newer versions.	
<b>3E1</b>	3-port E1 card Available for <b>CHJ only</b> and software version <b>1.02.01</b> or newer versions.	
<b>2GH</b>	2-port G.SHDSL card Available for software version <b>1.08.01</b> or newer versions.	
<b>4GH</b>	4-port G.SHDSL card Available for hardware version <b>G</b> and software version <b>4.01.01</b> or newer versions.	
<b>TDMoE</b>	TDMoE card	
<b>12/24FXS</b>	12/24 FXS card Available for hardware version <b>L</b> and software version <b>3.01.01</b> or newer versions.	
<b>12/24FXO</b>	12/24 FXO card Available for hardware version <b>G</b> and software version <b>2.01.01</b> or newer	

card=	Description	Note
	versions.	
<b>8E&amp;M</b>	8-port E&M card Available for software version <b>1.03.01</b> or newer versions.	
<b>8RS232</b>	8 RS232 card Available for software version <b>3.02.01</b> or newer versions.	
<b>8DBRA</b>	8 Data Bridge A card	
<b>Conference</b>	Conference card Available for hardware version <b>C</b> and software version <b>1.02.01</b> or newer versions.	
<b>6V.36A</b>	6-port V.36 card Available for hardware version <b>B</b> and software version <b>2.03.01</b> or newer versions.	
<b>6V.35A</b>	6-port V.35 card Available for hardware version <b>E</b> and software version <b>2.03.01</b> or newer versions.	
<b>X.21/V.11</b>	6-port X.21 card Available for hardware version <b>B</b> and software version <b>2.03.01</b> or newer versions.	
<b>6EIA530/6RS449</b>	6-port EIA530/RS449 card Available for hardware version <b>B</b> and software version <b>2.03.01</b> or newer versions.	

**Example 1:**

**Loop-AM3440-CHA, Loop-AM3440-CCA-E, Loop-AM3440-S5, Loop-AM3440-4E1-RJ, Loop-AM3440-8RS232  
Loop-AM3440-FAN:**

For 3440-A type chassis with a CPU card(E1 external clock), a single -48 Vdc 150W power module, 4-channel E1 interface with RJ48C connectors, one 8RS232 plug-in module and fan tray.

**Example 2:**

**Loop-AM3440-CHB, Loop-AM3440-CCA-E, Loop-AM3440-SDB, Loop-AM3440-M4E75, Loop-AM3440-8CD:**

For 3440-B type chassis with a CPU card(E1 external clock), a single -48 Vdc 100W power module, one Mini Quad E1 interface with 75 ohm and one 8-channel G.703 interface at 64 Kbps data rate.

**Example 3:**

**Loop-AM3440-CHC, Loop-AM3440-CCA-E, Loop-AM3440-SDB, Loop-AM3440-M4E120, Loop-AM3440-2GH:**

For 3440-C type chassis with a CPU card(E1 external clock), a single -48 Vdc 100W power module, one Mini Quad E1 interface with 120 ohm and one 2-channel G.SHDSL plug-in module (2 pair).



The list shown below is the discontinued chassis and plug in cards. For detail info, please contact your nearest Loop sales representative.

Model	Description	Note
Loop-AM3440-CH	32 Mb/s cross-connect capacity backplane t without CPU, power and plug-in cards	AM3440-CH type Chassis
Loop-AM3440-6U	6-channel IDSL plug-in card	
Loop-AM3440-10U	10-channel IDSL plug-in card	
Loop-AM3440-3H	3-channel MDSL plug-in card (2Mb for 3-channel)	
Loop-AM3440-3HA	3-channel MDSL plug-in card for	AM3440-A/B/C only
Loop-AM3440-3HAL	3-channel 6Mbits MDSL plug-in module with line power source	AM3440-A only Factory installed option available with -48 Vdc powered chassis only.
Loop-AM3440-5RS232	5-channel RS232 plug-in card with X.50 substrate plug-in module	
Loop-AM3440-AFRE	E1 Frame Relay to ATM inter-working or Frame Relay to Frame Relay concentration plug-in card	
Loop-AM3440-AFRT	T1 Frame Relay to ATM inter-working or Frame Relay to Frame Relay concentration plug-in card	

## Loop-AM3440 Access DCS-MUX Product Specifications

### Network Line Interface - T1

Line Rate	1.544 Mbps $\pm$ 32ppm	Output Signal	DSX1w/0, -7.5, -15 dB LBO
Line Code	AMI or B8ZS	Framing	D4/ESF (selectable)
Input Signal	DSX-1 0 dB to -30 dB w/ALBO	Connector	RJ48C

### Network Line Interface - E1

Line Rate	2.048 Mbps $\pm$ 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

### Network Line Interface - Mini 4E1

Line Rate	2.048 Mbps $\pm$ 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	DB25S
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

### Network Line Interface - 3E1

Line Rate	2.048 Mbps $\pm$ 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823
Function	Support DS0-SNCP		

### Network Line Interface - 4E1

Line Rate	2.048 Mbps $\pm$ 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

### Network Line Interface - 4T1

Line Rate	1.544 Mbps $\pm$ 32 ppm	Output Signal	DSX1w/0, -7.5, -15 dB LBO
Line Code	AMI or B8ZS	Framing	D4/ESF (selectable)
Input Signal	DSX-1 0 dB to -30 dB w/ALBO	Connector	RJ48C

**ATM Frame Relay Network Line Interface (Discontinued)**

Supporting Network Interworking (FRF.5) and service interworking (FRF.8).

Network Interface:

- T1 Module: T1 ATM UNI  
FR (n x 64 Kbps, n=1 to 24)
- E1 Module: E1 ATM UNI  
FR (n x 64 Kbps, n= 1 to 31)

Up to 31 logical FR channels can be concentrated/ de-concentrated to FR or ATM.

Service Ports:

- T1/FT1 interface: n x 64 Kbps, n=1 to 24
- E1/FE1 interface: n x 64 Kbps, n= 1 to 31

Support HDLC to FR

Support HDLC to ATM

Supporting FR to FR multiplexing.

Support up to 128 DLCIs for total of 31 FR interfaces.

Support up to 128 VCs.

Peak cell rate on DLCI basis.

Manufacturing disable/enable ATM scrambling for internal testing (E1 ATM only).

AAL0 and AAL5 are supported in the ATM adaptation layer.

Support VBR service.

ANSI and ITU FR management protocols are supported.

Flash memory software download through RS485.

Only the PVC type of ATM/FR service is supported.

, IEC 61850-3, IEEE 1613

**Router Interface**

Number of ports	2 LAN ports, Max. 32 WAN ports
Physical Interface	10 BaseT x 1, 10/100 BaseT x 1
Connector	RJ45
Routing protocol	RIP-I, RIP-II
Data Rates	Channelized N x 64 Kbps up to T1/E1 capacity
Supporting Protocols	TCP/IP, PPP, HDLC

**Router-A Interface**

Number of ports	2 LAN ports, Max. 64 WAN ports, Each WAN port has data rate n x 64K bps, 1 ≤ n ≤ 32 (≤ 4Mbps for total of all 64 WAN ports)
Physical Interface	10/100 BaseT x 2
Connector	RJ45
Routing protocol	RIP-I, RIP-II, OSPF, Static
Supporting Protocols	PPP (IPCP/BCP), MLPPP, HDLC, Frame Relay, and Cisco compatible HDLC, NAT/NAPT, DHCP
Diagnostic	Ping, Trace route
QoS	Rate limit

**Router-B Interface**

Number of ports	8 LAN ports, Max. 64 WAN ports. Each WAN port has data rate n x 64K bps, 1 ≤ n ≤ 32 (≤ 8Mbps for total of all 64 WAN ports)
Physical Interface	10/100 BaseT x 8
Connector	RJ45
Routing protocol	RIP-I, RIP-II, OSPF, Static
Supporting Protocols	PPP (IPCP/BCP), MLPPP, HDLC, Frame Relay, and Cisco compatible HDLC, NAT/NAPT, DHCP
Diagnostic	Ping, Trace route
QoS	Rate limit
VLAN Q-in-Q	IEEE 802.1ad

**Terminal Server Interface**

Connector	One DB-44 conversion cable to one DB-9 and two DB-25 connectors
Ports	One Async RS232 port, two Async/Sync RS232 ports. The two Async/Sync ports can be configured independently as Asynchronous or Synchronous.
Data Rate	Async: 1.2kbps, 2.4kbps, 4.8kbps, 9.6kbps, 19.2kbps, 38.4kbps Sync: 64 kbps
Layer 2 Protocol of RS232 Async	raw data
Layer 2 Protocol of RS232 Sync	PPP

Terminal Server Function      Supports Telnet  
Router Function                RIP-I, RIP-II, Static Route

**Fiber Optical Interface (FOM, 1FOM-A)**

Source	MLM Laser	Line Code	Scrambled NRZ
Wavelength	1310 ± 50 nm, 1550 ± 40 nm	Detector Type	PIN-FET
50 Km reach		Protection	Optional 1+1 APS

**NOTE:** Longer or shorter, 15 to 120Km, on special order.

Optical Module	Fiber Direction	Wavelength (nm)	Connector	Distance (km)
SAA	Dual uni-directional	1310	SC (Subscriber Connector)	30
SBB	Dual uni-directional	1310	SC (Subscriber Connector)	50
SCC	Dual uni-directional	1310	FC (Fiber Connector)	30
SDD	Dual uni-directional	1550	SC (Subscriber Connector)	20
SEE	Dual uni-directional	1550	SC (Subscriber Connector)	100
SSM	Single bi-directional (master)	1310/1550	SC (Subscriber Connector)	30
SSS	Single bi-directional (slave)	1550/1310	SC (Subscriber Connector)	30

**NOTE:** Other fiber optical options available on special order

**G.SHDSL Line Interface**

Number of ports	2 or 4
Line Rate for 4-channel G.shdsl	n x 64Kbps (n= 3 to 31)
Line Rate for 2-channel G.shdsl	n x 64Kbps (n= 3 to 15)
Line Code	16-TCPAM, full duplex with adaptive echo cancellation
Connector	RJ45
Electrical	Unconditioned 19-26 AWG twisted pair
Sealing current	Max. 20 MA source current
Clock Source	From System, Line
Diagnostic Test	G.SHDSL Loopback: To-LINE, To-bus BERT: QRSS

**DTE Interface (X.21)**

Data Port	Up to six 6-port DTE X.21 card; 1-port DTE X.21 card
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB15S

**DTE Interface (V.35)**

Data Port	Up to six 6-port DTE V.35 card; ; 1-port V.35 card
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB25S (optional conversion cable DB25S to M34 connector)

**DTE Interface (V.36)**

Data Port	Up to six 6-port DTE V.36 card
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB25S (optional conversion cable DB25S to DB37 connector)

**DTE Interface (EIA530/RS449)**

Data Port	Up to six 6-port EIA530 DTE card; 1-port EIA530 card
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB25S (optional conversion cable DB25S male to DB37 female connector for RS449)

**DTE Interface (RS232/V.24)**

Data Port	1-port RE232 card
Data Rate	56 or 64 Kbps *n, n=1 - 2
Mapping	Any sequential time slots

**DTE Interface (RS232-X.50 mux. 8-port)**

Data Port	Up to twelve 8-port RS232 cards							
MUX	Maximum 5 subrate port per 64K bps							
Data Rate	Asynchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K					
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K					
	Synchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K					
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 48K, 64K					
	Port Number							
Card Type	1	2	3	4	5	6	7	8
Eight RJ48	Async/ Sync <sup>Note 1</sup>	Async/ Sync <sup>Note 1</sup>	Async	Async/ Sync <sup>Note 1</sup>	Async/ Sync <sup>Note 1</sup>	Async	Async	Async
Two DB44 + Two RJ48 Connector	Async/Sync	Async/Sync	Async	Async/Sync	Async/Sync	Async	Async	Async
Conversion Cable	Eight RJ48 (port 1 to port 8) DB44 (port1,port2,port3), DB44 (port4,port5,port6), RJ48 (port7) and RJ48(port8)							
Electrical	A three-into-one conversion cable adapts the DB44 connector to 3 connectors (one DB9S and two DB25S) RS232 Interface, DCE							

**Note 1: Sync-** with rate up to 19.2 Kbps achieved by oversampling at 64 Kbps

**DTE Interface (Data Bridge Card)**

Data Port	Up to twelve 8-port data bridge card (each card supports up to 120 DS0 for data bridge)
Feature	20 end points per multi-drop circuit to into a logical ended 56K or 64K channel Per port supports bridge function to N remote Trib. Site (N=1~20)
Data Rate	Asynchronous Support to receive 1200 to 19200 bps asynchronous data via oversampling channel
Bridge function	one port with one DS-0 to many (Maximum is 20 for remote Tributary data box ) 20 drops for each DS0 to remote Tributary data box and 8 ports RS232 shared the 128 channels.

**8UDTEA (RS232/RS422/RS485) universal data Interface**

Data Port	8 port UDTE card
ASYNCR Data Rate	200,300, 600, 1200, 2400, 4800, 9600, 19.2K, 38.4K, 57.6K, 115.2K, 128K bps by oversampling
Connector	RJ48C
Interface	DCE only
Flow Control (RS232 only)	Hardware (RTS and DTR), none
Loopback function	DTE to DTE loopback DTE to Line loopback

**1 Port OCU-DP Interface Card**

Ports	1 Ports card
Operating Modes	4-wire DDS or switched 56
Dedicated Rates	SYNC: 2.4, 4.8, 9.6, 19.2, 56 and 64k clear channel Conforms with AT&T Pub 41458
OCU DP Operation	Conforms with AT&T 62310 and ANSI T1.410
Local Loop Signal	Bipolar Return to zero, 50% duty cycle
Transmit Amplitude	+/- 1.5 V (+/- 10%) peak, all rates except 9.6k +/- 0.75 V (+/- 10%) peak at 9.6k
Transmit Source Impedance	135 Ohms +/- 20%
Receive Input Impedance	135 Ohms +/- 20%
Receiver Sensitivity/ Dynamic Range	0 to 43 dB loop loss at 72K & 56K 0 to 34 all other rates
Physical Interface	4-wire loop interface RJ45 modular connector
Network to Loop Test Codes	Zero code suppression, Idle, out of service, UMC, MOS, TC, ABS, channel loopback, OCU and DSU loop-back, latch loop-back (TIP, LSC, LBE, FEV)
Loop to Network Test Codes	Zero code suppression, Idle

**8 Port OCU-DP Interface Card**

Ports	8 Ports for each card
Line Status Indicator	Per Port 1 dual color LED; Red for LOS, Green for SYNC
Network Connector	RJ48S
Electrical Network Connection	Tip/Ring and Tip1/Ring1
Transmit Source Impedance	135 Ohms +/-20%
Receive Input Impedance	135 Ohms +/-20%
Receiver Sensitivity	0 to 43 dB loop loss at 72K & 56K
Dynamic Range	0 to 34 all other rates Automatic line equalization
Pulse Amplitude	+/- 1.5V (+/-10%) peak, all rates except 9.6K +/-0.75 (+/-10%) peak at 9.6K
Sealing Current	Bipolar Return to zero, 50 duty cycle Typically 16mA DC
Operating Modes	4-wire DDS Switched 56 support is optional
Circuit Rates	SYNC: 2.4, 4.8, 9.6, 19.2, 56, 72 kbps (64k) clear channel Conforms with AT&T Pub 41458
Encoding and decoding rules	Use bipolar violation to indicate control information: Idle, out of service, Zero Substitution using unframed loops
Maintenance control	DSU Non-latching loop-back code (for 2.4, 4.8, 9.6, 19.2, 56k circuit rate) DSU Latching loop-back (TIP, LSC, LBE, FEV) code (for 72k circuit rate)
	Machine maintenance OCU/DP card operation: Payload loopback OCU loopback Local loopback Bi-directional loopback V.54 remote loopback code Custom defined remote loopback code BERT test support all ones, all zeros, 2047,511,63 pattern.
Fault and Performance	LOS, OOS, ES, SES and UAS alarm. Current, last 96 registry and 7 days performance storage.
Environment	Operating: 0-50°C Storage: -25-75°C Humidity: Up to 90% RH non-condensing
Specification Standard	ANSI T1.410; AT&T Pub 62319, AT&T Pub 62310, ITU-T V.54

**Co-directional Interface**

Interface	ITU G.703 64 Kbps co-directional interface
Connector	120ohm, RJ48
Line Distance	Up to 500 meters
Loopback	DTE Payload Loopback, Local Loopback

**C37.94 Interface**

Source	LED
Wavelength	820nm 2Km reach
Connector	ST
Optical Budget	50 Mircon core/9.6 db 62.5 Mircon core/ 15db

**Dry Contact Interface**

<b>Inputs -</b>		<b>Outputs -</b>	
8-channel	2-port per card, 4-pair per port	8-channel	8-pair per card
Connector	RJ45	Connector	Screw type
Internal Resistance	1 K	Initial Insulation Resistance	Min. 100M ohm (at 500 Vdc)
Activation Current	3 ma	Max. Current	5A
Deactivation Current	1.5 ma	Max. Voltage	100 Vdc, 250 Vac
Allowable Current	4 ma		

**Dry Contact Type B Interface****Inputs -**

8-channel	2-port per card, 4-pair per port
Connector	RJ45
Internal Resistance	100 K
Activation Current	3 ma
Deactivation Current	1.5 ma
Allowable Current	4 ma

**Outputs -**

8-channel	8-pair per card
Connector	Screw type
Initial Insulation Resistance	Min. 1000M ohm (at 500 Vdc)
Max. Current	2A
Max. Voltage	220 Vdc, 250 Vac

**Voice Card (Q2EM, Q4EM)**

Connector	One 44-pin connector, adapter cable included for 4 RJ45 connectors.
Power	110-220Vac, -24Vdc, -48Vdc
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or $\mu$ -law, user selectable as a group
Impedance	Balanced 600 $\Omega$ or 900 $\Omega$
Longitudinal Rejection	55 dB
Longitudinal Max	2.5 volts peak AC
Longitudinal Balance	> 63dB
Gain Adjustment	0, -3, -6 or +7 dB for transmit (D/A) gain
(all port settings)	0, -3, -6 or +10 dB for receive (A/D) gain

Signal/Distortion	> 46dB with 1004 Hz, 0dBm input
Frequency Response	+0.5 to -0.9 dB from 300 to 3400 Hz
Idle Channel Noise	< 20 dBmC0
Signaling	Type 1, Type 2, Type 3, Type 4, Type 5, and also TO (Transmit Only)
Modems	Full compatibility with V.90 modems
E Lead Sensor Current	0.25 mA (minimum)
Signaling Bit Setting	Jump Selectable
Operational Temp.	0°C to +50°C
Relative Humidity	0% to 95%

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.

**Voice Card (8EM)**

Connector	Eight RJ45
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or $\mu$ -law, user selectable together for all
Impedance	Balanced 600 or 900 ohms
Gain Adjustment (Per-port setting)	-16 to +7 dB / 0.1dB step for transmit (D/A) gain -16 to +14 dB / 0.1dB step for receive (A/D) gain
I/O Power Range	A/D Analog input level: -66 dBm (0.00039 Vrms) ~ + 3 dBm (1.09 Vrms) D/A Analog output level: -66 dBm (0.00039 Vrms) ~ + 4 dBm (1.22 Vrms)
Gain Variation	$\pm$ 0.5 dB at 0 dBm0 input
Frequency Response	$\pm$ 0.5 dB at 0 dBm0 input
Longitudinal Conversion Loss	> 46dB
Total Distortion	> 35 dB at 0 dBm0 input
Idle Noise	< -65 dBm0p
Carrier Connection	Side A ( exchange side) and Side B (carrier side) setup by side switch
Idle Channel Noise	Max. -65 dBm0p
Wire Mode	2 wire and 4 wire (programmable)
Signaling	Type 1, Type 2, Type 3, Type 4, and Type 5, Transmit only (programmable)
Modems	Full compatibility with V.90 modems

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.



**Voice Card 12 MAG (Magneto)**

Connector	RJ11 x 12
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or $\mu$ -law, user selectable together for all
Impedance	Balanced 600 or 900 ohms (for magneto telephone impedance )
Longitudinal Conversion Loss	> 46dB
Gain Adjustment	-21 to +10 dB / 0.1dB step transmit & receive
Signal/ Distortion	> 25dB with 1004 Hz, 0dBm input
Frequency Response	- 0.25 to -1 dB from 300 to 3400 Hz, coincide with ITU-T G.712
Idle Channel Noise	Max. -65 dBm0p

**Signaling**

Minimum Detectable Ringing Voltage	16 Vrms
Crank Detectable Across	L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND)
Crank Detected time	Valid crank: more than 250 ms
Ring Generation	Invalid crank: less than 160 ms
	Voltage: 76 Vrms (sine wave)
	Frequency: 20Hz (with optional choices of 16, 25, 50 Hz)
Ring duration	Two optional modules are available for your choice:
	1. 12MAG
	Normal operation: Ring duration depends on cranking time
	PLAR ON operation: when FXS phone off-hooked, the ring duration of the far-end magneto phone could be 0.5, 1.0, 2.0 or 4.0 sec
	2. 12MAG-A
	Normal operation: Crank the phone for one time, and the ring duration of the far-end phone could be 0.7, 1.5 or 2.0 sec
	PLAR ON operation: when FXS phone off-hooked, the ring duration of the far-end magneto phone could be 0.7, 1.5 or 3.0 sec
Ring Send Across	L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND)
Signaling	Turn Magneto Phone crank (Ringing across Tip and Ring or Tip and Ground)
Signaling Bit A,B,C,D	Programable
	<ul style="list-style-type: none"> <li>• Signaling is carried transparently by the digitizing process.</li> <li>• Use Magneto card default setting for communications between magneto telephones</li> <li>• Use Magneto card PLAR mode setting for communications between a magneto telephone and a regular telephone</li> </ul>

**Conference Card****RS232 Interface**

Data Port	2-ports per card
ASYNCR Data Rate	300, 600, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K
SYNC	not supported
Connector	Two DB9, DCE, female

**FXS Voice Interface**

Connector	Two RJ11
Encoding	G.723
Longitudinal Conversion Loss	> 46dB
Cross Talk Measure	Max -70dBm0
Gain Adjustment	transmit (D/A) gain 0, +6dB receive (A/D) gain +6, 0, -6dB
Signal/ Distortion	> 25dB with 1004 Hz, 0dBm input
Idle Channel Noise	Max. -65 dBm0p
Loop Resistance	Max 1800 ohm
FXS Loop Feed	-48 Vdc with 25mA current limit per port
FXS Ringing	2 REN 20Hz 76 Vrms 2 sec on / 4 sec off for 1 min, or 1 sec on / 2 sec off for 30 sec (programmable)
Signaling	Loop Start, DTMF

**E&M Voice Interface**

Connector	Two RJ45
Encoding	G.723
Impedance	Balanced 600 ohms
Longitudinal Conversion Loss	> 46dB
Gain Adjustment	transmit (D/A) gain 0, +6dB receive (A/D) gain +6, 0, -6dB
Signal/Distortion	> 25dB with 1004 Hz, 0dBm input
Idle Channel Noise	Max. -65 dBm0p
Carrier Connection	Side A = exchange side, Side B = carrier side (Jumper selectable)
Phone line power+12V	Type P (Jumper enable)
Operation mode	Master, standard (Jumper selectable)
Wire Mode	4 wire
Signaling Type	Type 1, Type 4, and Type 5 (Jumper selectable)
EM Ringing	Single ringing for 5 sec only 2 sec on / 4 sec off for 1 min, or 1 sec on / 2 sec off for 30 sec (programmable)

**Voice Card (QFXS, QFXO)**

Quad FXS voice card (4 FXS per plug-in)

Quad FXO voice card (4 FXO per plug-in)

Connector QFXS: 1, 2, 3, or 4 FXS per RJ11 connector, QFXO: 1, 2, 3, or 4 FXO per RJ11 connector

Power for QFXS 110-220Vac, -24Vdc or -48Vdc

Power for QFXO 110-220Vac, -24Vdc, and -48Vdc

Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF

Encoding A-law or  $\mu$ -law, user selectable together for all

AC impedance Balanced 600 or 900 ohms (selectable together for all)

Longitudinal Rejection 55 dB

Loss Adjustment 0, 3, 6, or 9 dB transmit &amp; receive

Signal/ Distortion &gt; 46dB with 1004 Hz, 0dBm input

Frequency Response - 0.25 to -1 dB from 300 to 3400 Hz

FXS Loop Feed -48Vdc or -24Vdc with 25mA current limit per port

Jumper Selectable: 25mA, 30mA, 35mA

FXO Ringing REN 0.5B (AC)

Detectable Ringing 25 Vrms

Loop Resistance  $\leq 1800 \Omega$ DC impedance > 1M  $\Omega$ 

(ON-HOOK)

DC 235  $\Omega$  @ 25mA feed

impedance(OFF-HOOK)

90  $\Omega$  @ 100mA feed

FXS Ringing Support 2 REN per port (1 REN = 6930 $\Omega$  + 8  $\mu$ F)  
 20 Hz, other frequencies: 16.7Hz, 25 Hz, 50Hz (Jump selectable)  
 78 Vrms (sine wave) (45 Vrms to 86 Vrms wide range by Resistor selectable)  
 2 sec on 4 sec off, or 1 sec on 2 sec off optional for PLAR

Metering Pulse 12KHz/ 16KHz

• Power: 10dBm

• Sensitivity: -27dBm (-21dBm to -45dBm by Resistor selectable)

Signaling Loop Start, GND-Start, Metering Pulse (12KHz, 16KHz), DTMF, Dialing Pulse, PLAR,  
 Battery Reverse (supports Line Reverse Signaling for Billing)

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.
- -24Vdc power is for FXS PCB version C and up

**Voice Card (12FXS, 12FXO, 24FXS, 24FXO)**

12 FXS/FXO Connector Twelve RJ11

24 FXS/FXO Connector One RJ21X Female

Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF

Encoding A-law or  $\mu$ -law, user selectable together for all

AC Impedance Balanced 600 or 900 ohms (selectable together for all)

Longitudinal Conversion Loss &gt; 46dB

Cross talk measure Max -70dBm0

Gain Adjustment FXS: -21 to +3 dB / 0.1dB step transmit &amp; receive

FXO: -21 to +10 dB / 0.1dB step transmit &amp; receive

Signal/ Distortion &gt; 25dB with 1004 Hz, 0dBm input

Frequency Response - 0.25 to -1 dB from 300 to 3400 Hz, coincide with ITU-T G.712

Idle Channel Noise Max. -65 dBm0p

Variation of Gain  $\pm 0.5$ dB

FXO Ringing REN 0.5B (AC)

Detectable Ringing 25 Vrms

Loop Resistance  $\leq 1800 \Omega$ DC Impedance (ON-HOOK) > 1M  $\Omega$ DC Impedance (OFF-HOOK) 235  $\Omega$  @ 25mA feed90  $\Omega$  @ 100mA feed

FXS Loop Feed -48Vdc or -24Vdc with 25mA current limit per port  
 Jumper Selectable: 25mA(default=25mA), 30mA, or 35mA(sn=S1)

FXS Signalling Normal / PLAR: Private Line Auto Ring down

FXS Ringing 1 REN at 5K meters per port

16.7Hz, 20Hz, 25Hz, 50Hz, user selectable for all ports

Jumper selectable: 64, 76, and 85 Vrms (triangle wave), (default= 76 Vrms for Ring Voltage)

- FXS Tone 2 sec on 4 sec off, or 1 sec on 2 sec off optional for PLAR ON  
 Alarm Tone: 480Hz/620Hz/-24dBm  
 Ring Back Tone: 440Hz/480Hz/-19dBm
- FXS functions Basic functions: Bettary Reverse, Loop Star, PLAR  
 Optional functions: PLAR ON/PLAR bit programmable, Ground Start, and/or Meter Pulse.
- Signaling Bit A,B,C,D Programable bit
- All in-band signaling tones are carried transparently by the digitizing process.
  - Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.
  - FXS specification shown above support FXS hardware version N and up.

**Phone Line Monitor Card**

- Connector Four RJ11 connectors  
 Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF  
 Encoding A-law or  $\mu$ -law, user selectable as a group  
 Impedance Balanced 15K Ohm  
 Total Distortion > 35dB with 1004 Hz, 0dBm input  
 Frequency Response 0 ~ -0.5 dB from 300 to 2000 Hz  
 -0.5 dB ~ -2 dB from 2000 to 3300 Hz  
 Idle Channel Noise > -60 dBm0  
 Gain Adjustment 0, -3, -6 or +7 dB for PLM (B) transmit gain (D/A)  
 (All Port Setting) 0, -3, -6 or +3dB for PLM (A) receive gain (A/D)  
 Off-Hook Detect Level < -6V Line to GND  
 Operational Temp. 0°C to 50°C  
 Relative Humidity 0% to 95%  
 Power 110 ~ 220 VAC, -48 Vdc

All in-band signaling tones are carried transparently by the digitizing process.

**Signaling Bits**

Status		Normal								AB Bit Invert							
		Tx				Rx				Tx				Rx			
		A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
PLM (A) to Line	Line On Hook	1	1	0	1					0	1	0	1				
	Line Off Hook	0	1	0	1					1	1	0	1				
PLM (B) to Monitor	Battery (-48V)					1	1	0	1					0	1	0	1
	Battery (-6V)					0	1	0	1					1	1	0	1

**TDMoE****Combo Gigabit Ethernet(GbE) Interface**

Number of Ports	2
Speed	10/100/1000M bps
Connector	RJ45 for twisted pair GbE, LC for optical GbE, auto detection

**Gigabit Ethernet(GbE) Interface**

Number of Port	2
Speed	10/100/1000 BaseT
Connector	RJ45

**Ethernet Function**

Basic Features	MDI/MDIX for 10/100/1000M BaseT auto-sensing Ping function contained ARP Per port, programmable MAC hardware address learn limiting (max. MAC table 8192 (8k) entry) Packet Delay Variation: <ul style="list-style-type: none"> <li>- Unframed T1: Up to 340 ms</li> <li>- Framed T1: Up to 256 ms</li> <li>- E1: up to 256 ms</li> <li>- Framed T1 with CAS: Up to 192 ms</li> </ul>
Packet Transparency	Packet transparency support for all types of packet types including IEEE 802.1q VLAN and 802.1ad (Q-in-Q)
QoS	User configurable 802.1p CoS, ToS in out going IP frame
Traffic Control	Ingress packet Rate limiting buckets per port for Ethernet port Supporting Rate-based and Priority-based rate limiting for LAN port Granularity: <ul style="list-style-type: none"> <li>• From 64 Kbps to 1 Mbps in increments of 64 Kbps</li> <li>• From 1 Mbps to 100 Mbps in increments of 1 Mbps</li> <li>• From 100 Mbps to 1000 Mbps in increments of 10Mbps</li> </ul> <p>Pause frame issued when the traffic exceeding the limited rate before packet dropped following IEEE802.3X</p>
Link Aggregation	WAN support link aggregation

**Jitter & Wander**

PPM: per G.823 Traffic
PPB: per G.823 Synchronous

**Standard Compliance**

IETF	TDMoIP (RFC5087), SAToP (RFC4553), CESoPSN (RFC5086)
IEEE	802.1q, 802.1p, 802.1d, 802.3, 802.3u, 802.3x, 802.3z, 802.1s, 802.1w, 802.1AX

**Clock Source**

Internal, E1/T1 Line, External

**Alarm Relay**

Max. Current: 1A for 24VDC, 0.625A for 48VDC  
Fuse alarm, performance alarm

**System Configuration Parameters**

Active Configuration, Stored Configuration, and Default Configuration (Stored in Non-volatile Memory)

**Management**

Console	Electrical: RS232; Connector: DB9, female User Interface: Menu driven VT-100
Ethernet	1 port, Connector: RJ45 10/100 Base T, SNMPv1, v3/Telnet/SSH
Inband Management	Inband 64 Kbps, support HDLC/PPP
Ethernet LCD	Optional

**Performance Monitor**

Performance Registers	Last 24 hours performance in 15 minute intervals and last 7 days in 24 hour summaries
Separate Registers	Network, user, and remote site
Performance Reports	Reports include E1 Bursty Errored Second, Severe Errored Second, Degraded Minutes. Also available in Statistics (%)
Alarm Queue	To record the latest alarm type, location, and date & time
Threshold	Bursty Seconds, Severely Errored Second, Degraded Minutes

**Diagnostics**

Loopback E1/T1 interface (Line Loopback, Payload Loopback, Local Loopback), DTE Loopback (DTE-to-DTE, DTE to Line)

Test Pattern For Controller: 2<sup>20</sup>-1, 2<sup>15</sup>-1, 2<sup>11</sup>-1, 2<sup>9</sup>-1, and 4-bye user define pattern

**Front Panel**

Controller LED Indicators Power, ACTIVE, ALARM  
A, B, C, D slots: SYNC/TEST, LOF, BPV, RAI/AIS

**Physical /Electrical**

	AM3440-A	AM3440-B	AM3440-C
Dimensions	432.4 x 220 x 223.5 mm (W×H×D)	438 x 110 x 224 mm (W×H×D)	438 x 132 x 224 mm (W×H×D)
Power	Single/ Dual -48 Vdc: -36 to -75 Vdc, 100 Watts max. Single/ Dual -48 Vdc: -36 to -75 Vdc, 150 Watts max. Single/ Dual -24 Vdc: -18 to -36 Vdc, 150 Watts max Single/ Dual -125 Vdc: -40 to -150 Vdc, 100 Watts max	Single/ Dual -48 Vdc: -36 to -75 Vdc, 100 Watts max. Single AC: 100 to 240 Vac, 50/60 Hz	Single/ Dual -48 Vdc: -36 to -75 Vdc, 100 Watts max. Single AC: 100 to 240 Vac, 50/60 Hz
Temperature	0-55°C	0-55°C	0-55°C
Humidity	0-95%RH (non-condensing)	0-95%RH (non-condensing)	0-95%RH (non-condensing)
Mounting	Desk-top stackable, 19" /23" rack mountable	Desk-top stackable, 19" /23" rack mountable	Desk-top stackable, 19" /23" rack mountable
Line Power Supply	Available only with DC power for G.SHDSL card only	N/A	N/A
Power Consumption	Max 110 Watts	Max 45 Watts	Max 57 Watts

**Certification**

AM3440-A	AM3440-B	AM3440-C
EN55022 Class A, EN50024, EN300 386, FCC Part 15 Class A, FCC Part 68, CS-03, IEC60950, UL60950, IEC 61850-3, IEEE 1613	EN55022 Class A, EN50024, EN300 386, FCC Part 15 Class A, FCC Part 68, CS-03, IEC60950-1, EN60950-1	EN55022 Class A, EN50024, EN300 386, FCC Part 15 Class A, IEC60950-1, CS-03, EN60950-1, IEC 61850-3, IEEE 1613

**Compliance**

ITU G.703, G.704, G.706, G.732, G.736, G.823, G.826, G.711, G.712, G.775, O.151, V.11, V.28, V.54  
IETF SNMP v.3 (RFC2571~2575)

**Specifications for Loop-VV Y-BOX****LINE**

Connector BNC or RJ48C  
Port Number For Y-BOX with BNC connectors: 4 line ports  
For Y-BOX with RJ48C connectors: 16 line ports  
Protection For Y-BOX with BNC connectors: support 2 Quad E1 plug-in card, 4 active E1, 4 standby E1  
For Y-BOX with RJ48C connectors: support 8 Quad E1 plug-in cards, 16 active E1, 16 standby E1  
For Y-BOX with RJ48C connectors: support 8 Quad T1 plug-in cards, 16 active T1, 16 standby T1

**Mechanical**

Height 44.5 mm/ 1.75 in  
Width 432 mm/ 17 in  
Depth 100 mm/ 3.9 in



**Certification of IEC 61850-3 and IEEE1613:**

The certification only applies to AM3440-A with -48Vdc(150W) and AM3440-C with -48Vdc(100W).

	Plug-in cards	AM3440-A	AM3440-C	
<b>Power</b>	Power Module	-48Vdc(150W)	-48Vdc(100W)	
<b>CTRL</b>	Console and SNMP port of CCA	√, S	√, S	
<b>Mini-Slot</b>	1-channel E1 (Single E1 interface)	√	√	
	1-channel T1 (Single T1 interface)	√	√	
	Mini Quad E1 (Four E1 interfaces)	√	√	
	1-channel E1 ATM/Frame Relay	√, S, D	D, x	
	1-channel T1 ATM/Frame Relay	√, S, D	D, x	
	Fiber optical interface	√	√	
	1-channel X.21	√, S	√, S	
	1-channel V.35	√, S	√, S	
	1-channel RS232	√, S	√, S	
	1-channel EIA530	√, S	√, S	
	Quad 2W/4W E&M (Four E&M voice interfaces)	x	√*	
	QFXS (Four FXS voice interfaces)	x	√*	
	QFXO (Four FXO voice interfaces)	x	√	
	2-LAN port/32 WAN port Router	√, S	√, S	
	2-LAN port/64 WAN port Router-A	√, S	√, S	
	3-channel Terminal Server	√, S	√, S	
	Phone Line Monitor (PLM) cards	x	x	
	1-channel OCU-DP	x	√	
	<b>Single-Slot</b>	3-channel E1	√	√
		4-channel E1	√	√
4-channel T1		√	√	
8-channel OCU-DP		√	x	
2-channel G.SHDSL (2 pairs) w/o line power		√	√	
4-channel G.SHDSL (1 pair) w/o line power		√	√	
8-channel G.703 card at 64 Kbps data rate		√	√	
8-channel Dry Contact I/O		√, S (Inputs)	√, S (Inputs)	
8-channel Dry Contact I/O type B		√, S (Inputs)	√, S (Inputs)	
8-channel 2W/4W E&M		√	√	
12-channel FXS		√	√	
12-channel FXO		√	√	
12-channel Magneto		x	x	
Conference card		√, S (DTE)	√, S (DTE)	
1-channel low speed optical (C37.94)		√	√	
4-channel low speed optical (C37.94)		√	√	
8-channel RS232 with X.50 substrate		√, S	√, S	
8-LAN-port/ 64-WAN-port Router-B		√	√	
4-channel TDMoE		x	√, S	
8-channel Data Bridge		x	√, S	
1FOMA		x	√	
8-channel UDTEA		x	√, S	
<b>Dual-Slot</b>		6-channel X.21/V.11	√, S	√, S
	6-channel V.35	√, S	√, S	
	6-channel V.36	√, S	√, S	
	6-channel EIA530/RS449 card	√, S	√, S	
	2-channel G. SHDSL (2 pairs) with line power	x	x	
	4-channel G. SHDSL (1 pair) with line power	x	x	
	24-channel FXS	√	√*	
	24-channel FXO	√	√	

Note: √ = Supported


D = Discontinued

\* = Power Option: pt1613

S = When Use Shield Cable

x = Not Support

## Application Illustrations

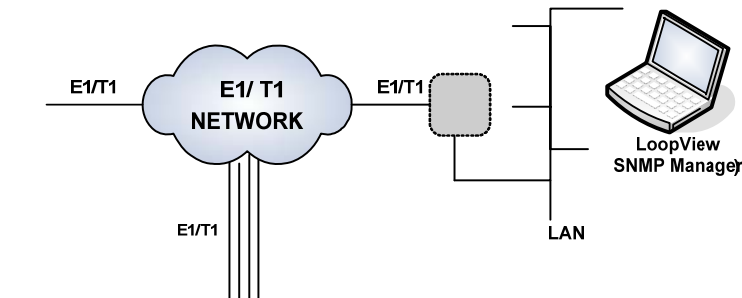

### Mini-Slot plug-in Cards

- ➔ 1 - channel E1
- ➔ 1 - channel T1
- ➔ Mini Quad E1
- ➔ 1 - channel E1 ATM Frame Relay (D)
- ➔ 1 - channel T1 ATM Frame Relay (D)
- ➔ 32 WAN port Router
- ➔ 64 WAN port Router
- ➔ Fiber Optical Interface
- ➔ 3- channel Terminal Server
- ➔ 1- channel DTE (1X.21, 1V.35, 1RS232, or 1EIA530)



### Single-Slot plug-in Cards

- ➔ 3 - channel E1 <sup>Note</sup>
- ➔ 4 - channel E1
- ➔ 4 - channel T1
- ➔ 8 - channel OCU-DP
- ➔ 2 - channel G.SHDSL w/o line power
- ➔ 4 - channel G SHDSL w/o line power
- ➔ 8 - channel G.703 64 Kbps
- ➔ 8 - channel Dry Contact I/O
- ➔ 8 - channel Dry Contact I/O type B
- ➔ 8 - channel 2 W/4 W E&M
- ➔ 12- channel FXS
- ➔ 12- channel FXO
- ➔ 12- channel Magneto
- ➔ 1 - channel C37.94
- ➔ 4 - channel C37.94
- ➔ 8 - channel RS232 with X.50 subrate
- ➔ 8 - LAN -port /64-WAN -port Router -B
- ➔ Conference card
- ➔ TDMoE
- ➔ 8- Data Bridge
- ➔ 1FOM-A
- ➔ 8UDTEA

### Dual-slot plug-in cards:

- ➔ 6 - channel X.21/V.11
- ➔ 6 - channel V.35
- ➔ 6 - channel V.36
- ➔ 6 - channel EIA530/RS449
- ➔ 24- channel FXS
- ➔ 24- channel FXO
- ➔ 2 - channel G.SHDSL w/line power
- ➔ 4 - channel G.SHDSL w/line power

Note : Only CHAJ Unit applicable to DS0 SNCP function  
(D) = Discontinued

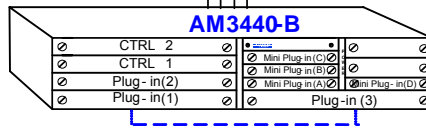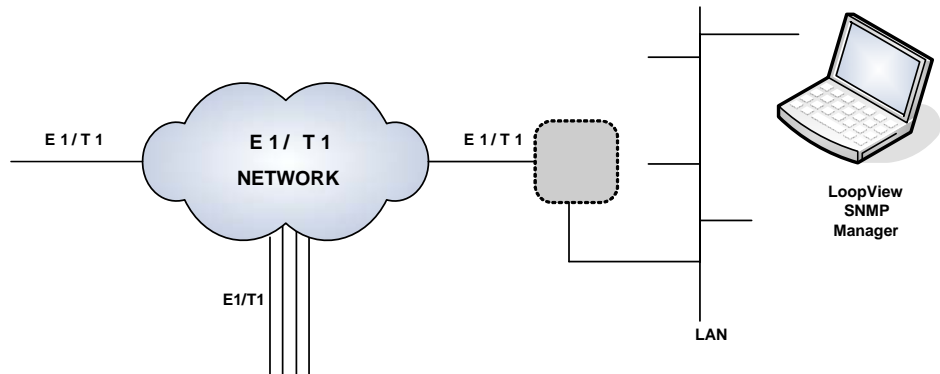

**Dual-slot plug-in cards:**

- 6- channel X.21/V.11
- 6- channel V.35
- 6- channel V.36
- 6- channel EIA530/RS449
- 24- channel FXS
- 24- channel FXO



**Single-Slot plug-in Cards:**

- 3- channel E1 <sup>Note</sup>
- 4- channel E1
- 4- channel T1
- 2- channel G.SHDSL w/o line power
- 4- channel G.SHDSL w/o line power
- 8- channel G.703 64 Kbps
- 8- channel Dry Contact I/O
- 8- channel Dry Contact I/O Type B
- 8- channel 2 W/4W E&M
- 12- channel FXS
- 12- channel FXO
- 12- channel Magneto
- 1- channel C37.94
- 4- channel C37.94
- 8- channel RS232 with X.50 substrate
- 8- LAN-port/ 64- WAN - port Router -B
- Conference card
- TDMoE
- 8- Data Bridge
- 1FOMA
- 8UDTEA

**Mini-Slot plug-in Cards**

- 1- channel E1
- 1- channel T1
- Mini Quad E1
- 1- channel E1 ATM Frame Relay (D)
- 1- channel T1 ATM Frame Relay (D)
- 32 WAN port Router
- 64 WAN port Router
- Fiber Optical Interface
- 3- channel Terminal Server
- Quad 2 W/4W E&M
- QFXS/QFXO
- 1- channel DTE (1X.21, 1V.35, 1RS232, or 1EIA530)
- 1- channel OCU-DP
- Phone Line Monitor Card

Note: Not Applicable to DS0 SNCP function  
(D) = Discontinued

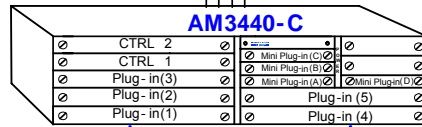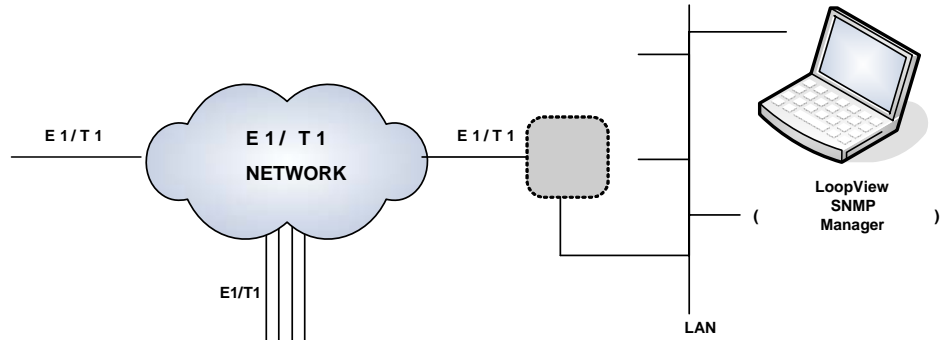

**Mini-Slot plug-in Cards**

- ➔ 1 - channel E1
- ➔ 1 - channel T1
- ➔ Mini Quad E1
- ➔ 1 - channel E1 ATM Frame Relay (D)
- ➔ 1 - channel T1 ATM Frame Relay (D)
- ➔ 32 WAN port Router
- ➔ 64 WAN port Router
- ➔ Fiber Optical Interface
- ➔ 3 - channel Terminal Server
- ➔ Quad 2 W/4 W E&M
- ➔ QFXS / QFXO
- ➔ 1 - channel DTE (1X.21, 1V.35, 1RS232, or 1EIA530)
- ➔ 1 - channel OCU-DP
- ➔ Phone Line Moitor Card

**Dual-slot plug-in cards:**


- ➔ 6- channel X.21/V.11
- ➔ 6- channel V.35
- ➔ 6- channel V.36
- ➔ 6- channel EIA530/RS449
- ➔ 24- channel FXS
- ➔ 24- channel FXO

**Single-Slot plug-in Cads:**

- ➔ 3 - channel E1 <sup>Note</sup>
- ➔ 4 - channel E1
- ➔ 4 - channel T1
- ➔ 2 - channel G.SHDSL w/o line power
- ➔ 4 - channel G.SHDSL w/o line power
- ➔ 8 - channel G.703 64 Kbps
- ➔ 8 - channel Dry Contact I/O
- ➔ 8 - channel Dry Contact I/O type B
- ➔ 8 - channel 2W/4W E&M
- ➔ 12- channel FXS
- ➔ 12- channel FXO
- ➔ 12- channel Magneto
- ➔ 1 - channel C37.94
- ➔ 4 - channel C37.94
- ➔ 8 - channel RS232 with X.50 subrate
- ➔ 8 - LAN-port / 64- WAN - port Router -B
- ➔ Conference card
- ➔ TDMoE
- ➔ 8- Data Bridge
- ➔ 1FOMA
- ➔ 8UDTEA


Note : Only CHCJ Unit applicable to DS0 SNCP function  
(D) = Discontinued

### ULSR Ring Application

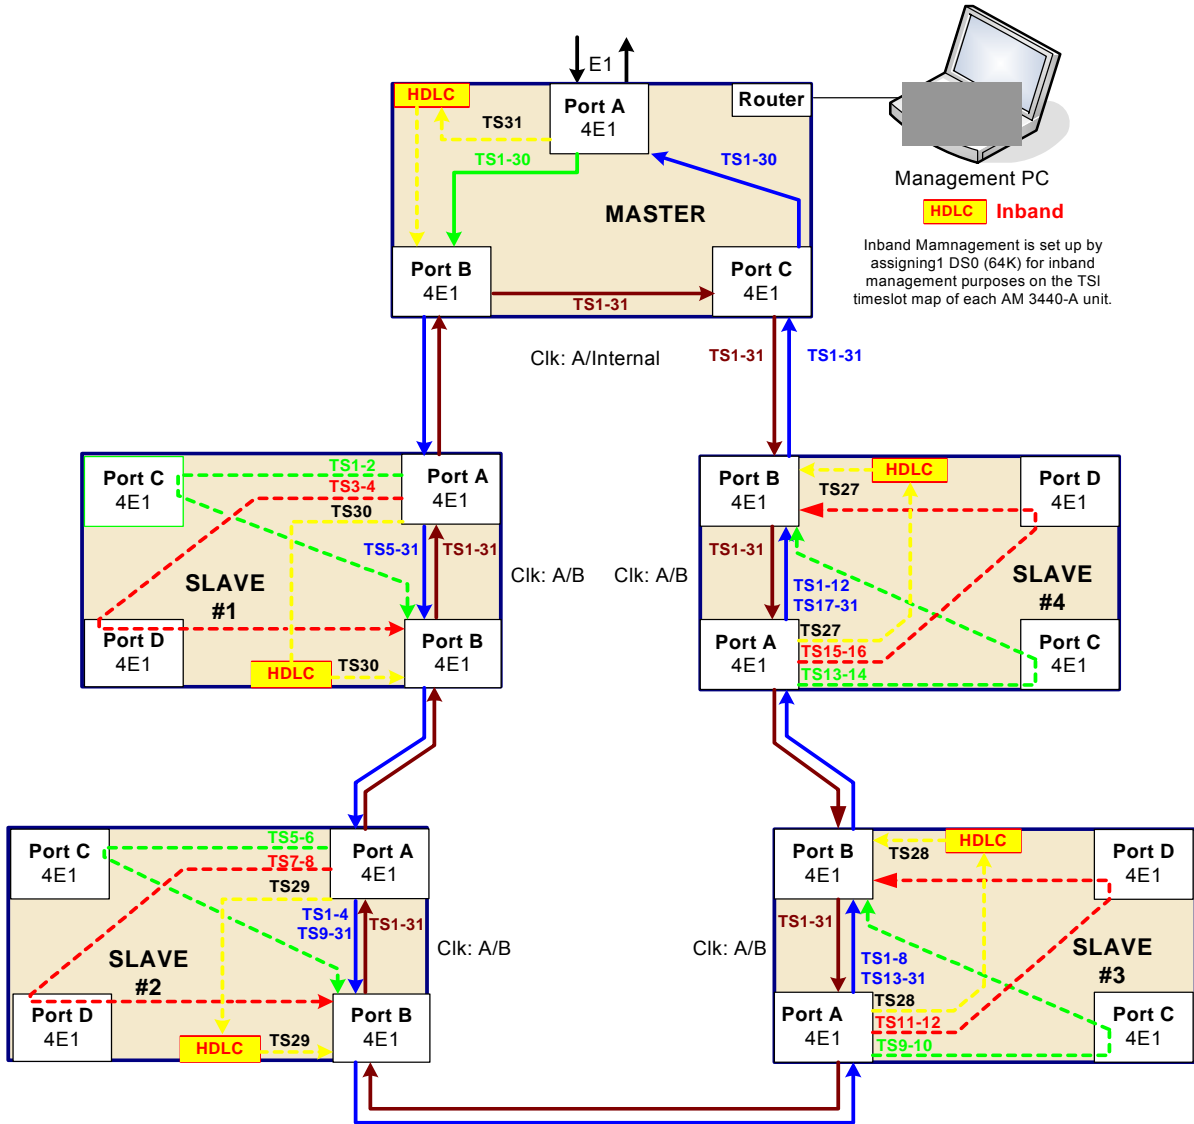

**Note:** ULSR ring does not support E1 unframed mode. Users must use E1 framed mode to set up a ULSR ring.

## AM3440 ULSR Ring Application through E1/T1 Radio

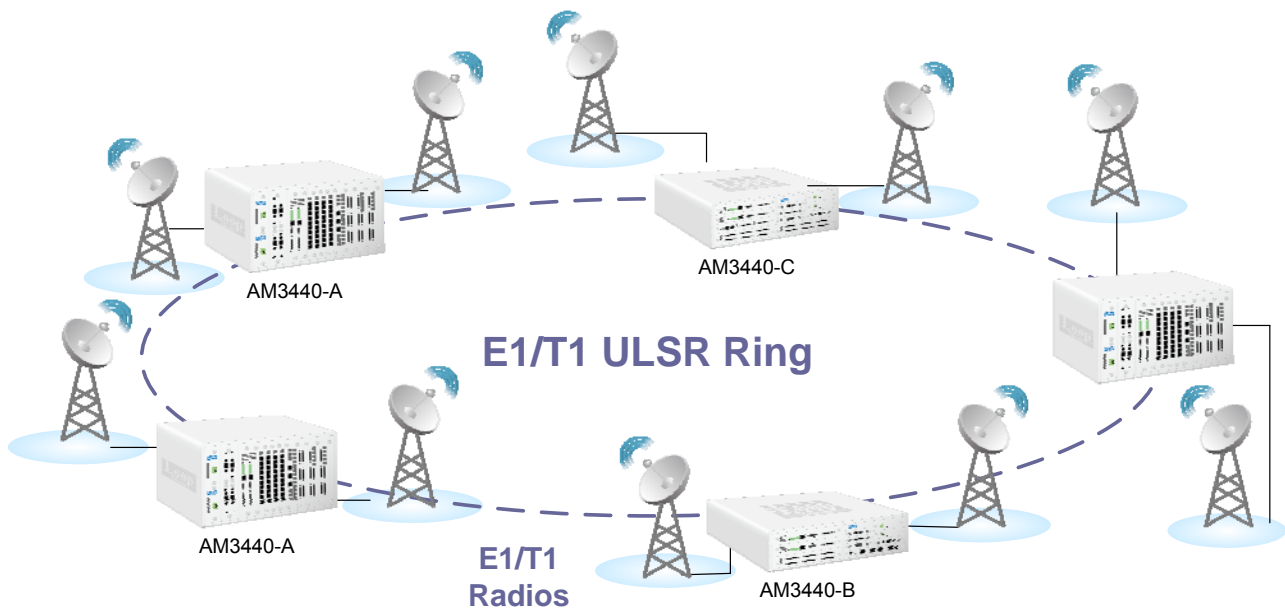

**LOOP TELECOMMUNICATION INTERNATIONAL, INC.**  
ISO 9001 / ISO 14001

### Worldwide

8F, No. 8, Hsin Ann Road  
Hsinchu Science Park  
Hsinchu, Taiwan 30078  
+886-3-578-7696  
www.looptelecom.com  
sales@loop.com.tw

### Taipei, Taiwan

6F, No. 36, Alley 38, Lane 358  
Rueiguang Road  
Neihu, Taiwan 11492  
+886-2-2659-0399  
michael\_tzeng@loop.com.tw

### North America

8 Carrick Road  
Palm Beach Gardens  
Florida 33418, U.S.A.  
+1-561-627-7947  
jimber561@aol.com

### Tianjin, China

No. 240 Baidi Road  
Nankai District  
Tianjin 300192 China  
+86-22-8789-4027  
wym@loop-tj.com

© 2013 Loop Telecommunication International, Inc.  
Version 84 21 MAR 2013

All Rights Reserved  
Subject to change without notice